



HDPE / PP / PP-R
PLASTIC PIPE
FUSION
EQUIPMENTS



**MADE IN
INDIA**



**WE UNDERSTAND
HOW IMPORTANT
STRONG BONDING IS!**



**ONE OF INDIA'S
LEADING & LARGEST
MANUFACTURER OF
BUTT FUSION &
ELECTRO FUSION
MACHINE**



KUSHAL
CRAFTED TO WELD BEST



About Us

Kushal Enterprise is India's leading manufacturer of HDPE / PP / PP-R Plastic Pipe Welding Equipments like Heater (Mirror), Butt Fusion (Manual and Hydraulic operation) and Electrofusion Welding Machines. Since past 22 Years of our existence, our steadfast focus has been providing BEST Standout features of our products:

- Easy to use
- Long life
- Sturdy design
- Crack resistant
- Light weight

We offer different models as per Customers Requirements with:

- Ready Stock Material
- On-time Dispatch
- Easy Payment Options
- Transparent Dealing
- Excellent Product Packaging

Who We Are

Our manufacturing infrastructure is spacious and is supported by highly advanced tools and machineries. Different teams assigned for different processes of Design, Manufacture, Quality Check, and Support ensure that our products meet our internally set highest standards of quality.

We continue to focus on making the best quality products at most competitive prices and achieve highest customer satisfaction.

We would be happy to partner with you for your welding / jointing needs of Plastic Pipes.



Cnc Machine

VMC machine
5 AXIS

CNC Laser
Cutting Machine

CNC Bending
Machine


MIG Welding
Machine

Precise
Fabrication

All our products are

100% MADE IN INDIA.

This ensures that all parts and components are easily available through our dealer network and also directly from our factory.

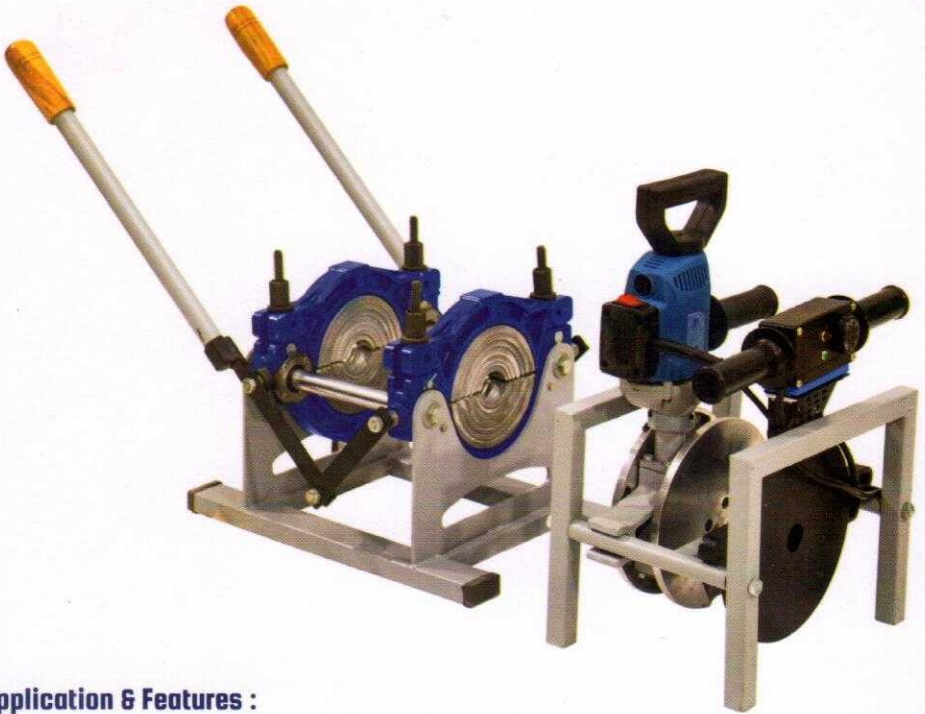


Application & Features :

- Suitable for butt fusion welding of plastic pipes and fittings made of PE, PP, and PVDF in construction site or workshop.
- Consists of basic frame, heating plate, and support for heating plate.
- Removable PTFE coated heating plate with inbuilt Thermostat temperature control system.
- Electric facer cutter with double cutting edge blades optional.
- It is made of lightweight and high strength material; simple structure and easy to operate.
- Use of high quality pressure casting allows low weight without compromising strength and performance, while providing extra strength.

Technical Specifications :



Model	P110	P160
Welding range (mm)	40.50.63.75.90.110.	50.63.75.90.110. 125.140.160
Heating Plate Max. Temp	270°C	270°C
Temp. Deviation in surface	< +5°C	< +5°C
Working voltage / Gen. Req.	220V 50Hz / 3kva	220V 50Hz / 3kva
Heating Plate Power	1.0 KW	2.2 KW
Facer Power	1.0 KW	1.0 KW
Net Weight Machine & Heater Support	18 KGS	20 KGS

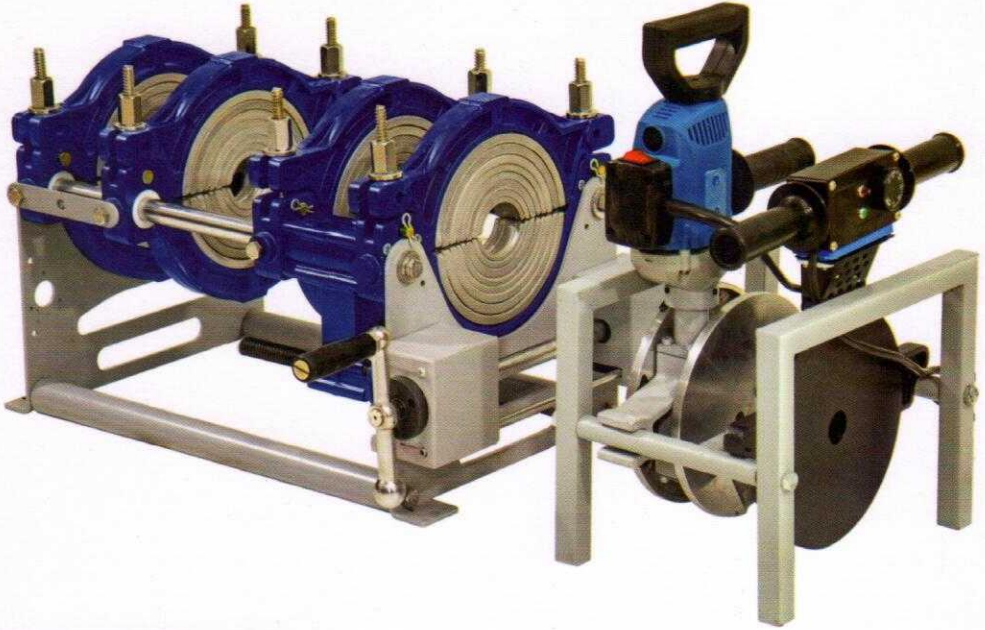


Application & Features :

- Easy Self Pressure Locking System. Suitable for butt fusion welding of plastic pipes and fittings made of PE, PP and PVDF in construction site or workshop.
- Consists of basic frame, heating plate, planning tool, and support (for planning tool & heating plate).
- PTFE coated heating plate with Thermostat Controller
- Electric facer cutter with double cutting edge blades.
- Low starting pressure ensures reliable welding quality of small pipes.
- It is made of lightweight and high strength material, simple structure and easy to operate.
- Use of high quality pressure casting allows low weight without compromising strength and performance, while providing extra strength when welding not perfectly round pipe.

Technical Specifications :



Model	R160	R200
Welding range (mm)	50.63.75.90.110. 125.140.160	63.75.90.110.125. 140.160.180.200
Heating Plate Max. Temp	270°C	270°C
Temp. Deviation in surface	< +5°C	< +5°C
Working voltage / Gen. Req.	220V 50Hz / 5kva	220V 50Hz / 5kva
Heating Plate Power	2.2 KW	2.2 KW
Facer Power	1.0 KW	1.0 KW
Net Weight Machine, Facer, Heater & Support	43 KGS	51 KGS

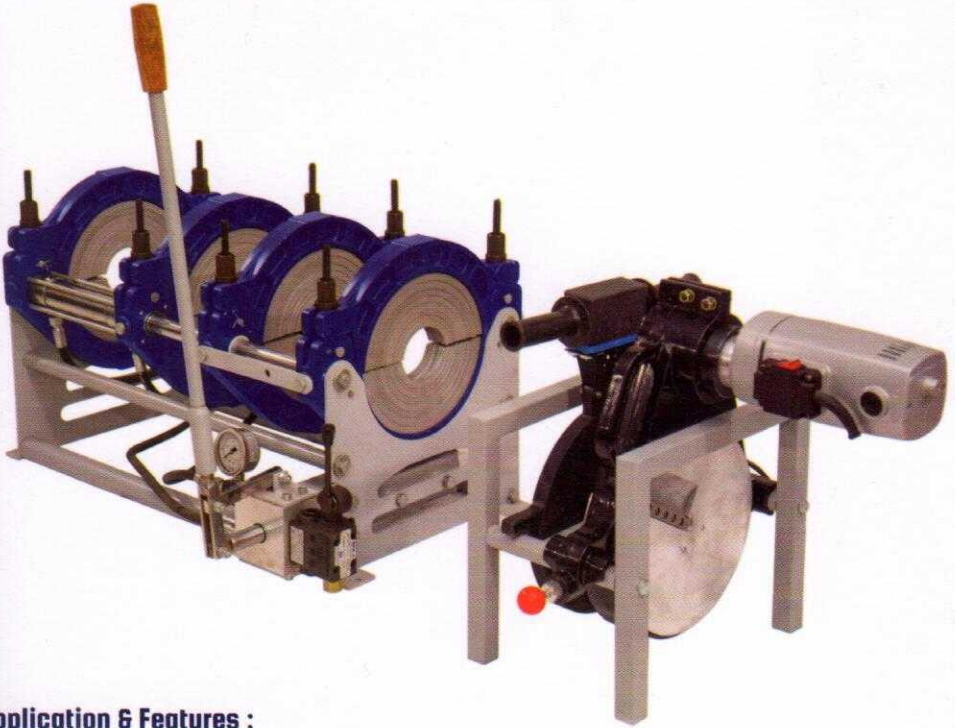

Application & Features :

- Suitable for butt fusion welding of plastic pipes and fittings made of PE, PP, and PVDF in construction site or workshop.
- Consists of basic frame, heating plate, planning tool, and support (for planning tool & heating plate) and hydraulic unit.
- Removable PTFE coated heating plate with inbuilt Digital temperature control system.
- Electric facer cutter with double cutting blades.
- Low starting pressure ensures reliable welding quality of small pipes.
- Use of high quality pressure casting allows low weight without compromising strength and performance, while providing extra strength when welding not perfectly round pipe.
- Hand pump hydraulic unit easy to use without power with accurate Analogue Pressure read out.
- Easy to read high accurate pressure gauge meter.

Technical Specifications :



Model	HP200	HP250	HP315
Welding range (mm)	63.75.90.110.125.140.160.180.200	90.110.125.140.160.180.200.225.250	90.110.125.140.160.180.200.225.250.280.315
Heating Plate Max. Temp	270°C	270°C	270°C
Temp. Deviation in surface	< +5°C	< +5°C	< +5°C
Working voltage / Gen. Req.	220V 50Hz / 5kva	220V 50Hz / 5kva	220V 50Hz / 5kva
Heating Plate Power	2.2 KW	2.6 KW	2.6 KW
Facer Power	1.0 KW	1.1 KW	1.1 KW
Net Weight Machine, Facer, Heater & Support	72 KGS	94 KGS	145 KGS



KUSHAL
CRAFTED TO WELD BEST



Mfg. by

KUSHAL ENTERPRISE

Mumbai Office

Mr. Hardik Patel : +91 9820 453 549 📞
1006, D. Square, opp. C.N.M.S School, 🏠
Vile Parle (West), Mumbai - 400056.
sales@anekplastics.com 📧

Factory


189, Shiv Shakti Estate, Behind V-Trans (INDIA) Ltd. 🏠
Narol, Ahmedabad - 382 405, Gujarat, India.
Mr. Kushal S. Rathod : +91 9879 777 123 📞
kushalindustries11@gmail.com 📧
www.kushalindustries.com 🌐





**MANUAL
ANALOGUE
CONTROL
(MAC)**

**DIGITAL
TEMPERATURE
CONTROL
(DTC)**

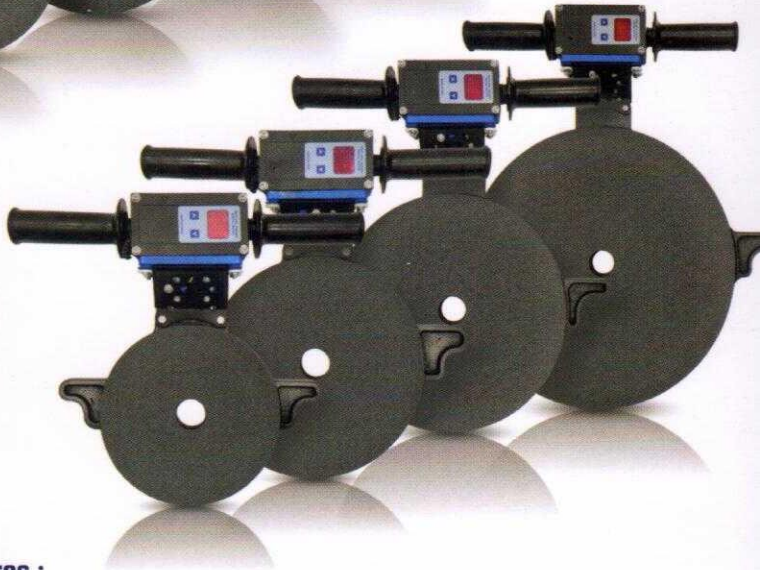

Application & Features :

- Suitable for butt fusion welding of plastic pipes and fittings made of PE, PP, and PVDF in construction site or workshop.
- Inbuilt thermostat controller with LED indication. (MAC)
- PID-SMPS based digital temperature controller. Easy to replace by yourself. (DTC)
- No handle breaking problem extra tough high strength rigid handle design.
- Super smooth Teflon coated surface.
- Casted heating plate for faster heating.

Technical Specifications :




Model	110	160	200	250	315
Power	220V-230V	220V-230V	220V-230V	220V-230V	220V-230V
Watt	400	2200	2200	2600	2600
Net Weight (Kg.)	1.7	2.6	3.4	5	7.5
Gross Weight (Kg.)	2	3	4	6	9

GAUGE Series Hydraulic Butt Welding Machine



Application & Features :

- Suitable for but fusion welding of plastic pipes and fittings made of PE, PP, and PVDF in construction site or workshop.
- Consists of basic frame, heating plate, planning tool, and support (for planning tool & heating plate) and hydraulic unit.
- Removable PTFE coated heating plate with inbuilt Digital temperature control system.
- Electric facer cutter with double cutting blades.
- Low starting pressure ensures reliable welding quality of small pipes.
- Use of high quality pressure casting allows low weight without compromising strength and performance, while providing extra strength when welding not perfectly round pipe.
- Hydraulic unit with accurate Analogue Pressure read out.
- Hose pipe with Quick Release Couplings.
- Electric Hoist Crane for 630 (Optional)

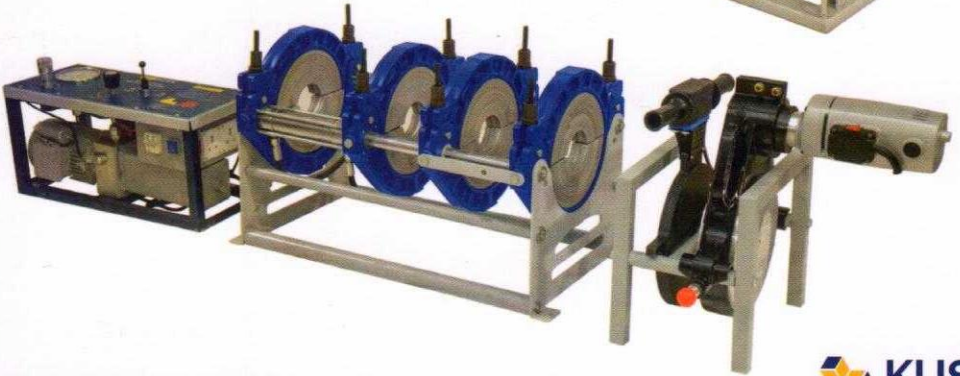

Technical Specifications :



Model	G200	G250	G315	G450	G630	
Welding range (mm)	63-200	90-250	90-315	200-450	315-630	
Heating Plate Max. Temp	270°C	270°C	270°C	270°C	270°C	
Temp. Deviation in surface	< +5°C	< +5°C	< +5°C	< +5°C	< +5°C	
Working voltage/Gen. Req.	220V / 5kva	220V / 7.5kva	220V / 7.5kva	440V / 15kva	440V / 15kva	
Heating Plate Power	2.2 KW	2.6 KW	2.6 KW	6.5 KW	7.5 KW	
Facer Power	1.0 KW	1.1 KW	1.1 KW	1.1 KW	1.1 KW	
Net Weight	Machine, Facer, Heater & Support	62 KGS	84 KGS	135 KGS	265 KGS	474 KGS
	Hydraulic Unit	33 KGS			45 KGS	