

CARBON FREE HOSE

ID		OD		Working Pressure		Bursting Pressure		Bending Radius		Weight	Max. Length
mm	Inch	mm	BAR	PSI	BAR	PSI	mm	Inch	KG/MTR	MTR	
31.00	1.1/4	44.00	17.2	250	69	1000	152	6.00	1.20	50	
38.00	1.1/2	51.50	17.2	250	69	1000	203	8.00	1.35	50	
50.00	2	66.00	14	203	56	800	304	12.00	2.60	40	
56.00	2.1/4	77.00	14	203	56	800	500	19.70	3.50	40	
70.00	2.3/4	90.00	14	203	56	800	800	31.50	7.60	40	
75.00	3	96.00	14	203	56	800	635	25.00	1.90	40	
88.00	3.1/2	111.00	14	203	56	800	1000	39.40	2.80	40	
100.00	4	124.00	10	145	40	580	1200	47.20	1.90	40	

TUBE:

Specially engineered non conductive rubber, white

REINFORCEMENT: SUBJECT TO ID

One or Multiple layers of Textile reinforced subjected to ID

COVER:

Specilly engineered Nitrile rubber cover, green

TEMP RANGE:

-40°C to +100°C Approx

APPLICATIONS:

Speciality hose for non conductive applications, majorly catering to furnace coolant conveyane & low current leakage.

PROPERTIES:

Heat Resistant
Non-Conductive tube and cover
Uniform Thickness
Industry Leader

APPLICABLE STANDARDS:


Indo-Maksson Proprietary

STANDARD COLOUR:

Inner Tube - White
Outer Cover - Green

MARKING ON THE HOSE:

Indo - Furnace- Carbon Free Hose Heat Resistant
I.D. W.P. India

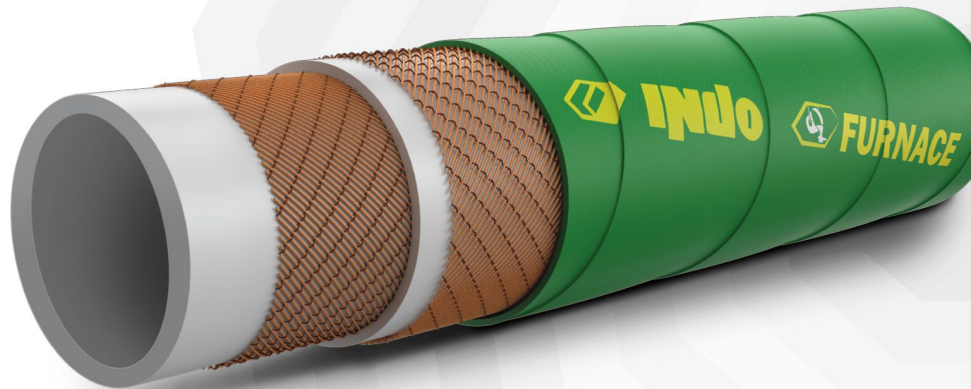

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.

CARBON FREE HOSE LL

ID		OD		Working Pressure		Bursting Pressure		Bending Radius		Weight	Max. Length
mm	Inch	mm	BAR	PSI	BAR	PSI	mm	Inch	KG/MTR	MTR	
10.00	3/8	18.00	17.2	250	69	1000	150	5.90	-	100+	
12.50	1/2	22.00	17.2	250	69	1000	102	4.00	0.44	100+	
16.00	5/8	26.00	17.2	250	69	1000	115	4.5	0.60	100+	
20.00	3/4	29.50	17.2	250	69	1000	127	5.00	0.62	100+	
25.00	1	37.00	17.2	250	69	1000	127	5.00	0.91	100+	
31.00	1.1/4	44.00	17.2	250	69	1000	152	6.00	1.20	50	
38.00	1.1/2	51.50	17.2	250	69	1000	203	8.00	1.35	50	
50.00	2	66.00	14	203	56	800	304	12.00	2.60	40	

TUBE:

Specially engineered non conductive rubber, white

REINFORCEMENT: SUBJECT TO ID

One or Multiple layers of Textile reinforced subjected to ID

COVER:

Specially engineered Nitrile rubber cover, green

TEMP RANGE:

-40°C to +100°C Approx

APPLICATIONS:

Speciality hose for non conductive applications, majorly catering to furnace coolant conveyance & low current leakage.

PROPERTIES:

Heat Resistant
Non-Conductive tube and cover
Uniform Thickness
Industry Leader

APPLICABLE STANDARDS:


Indo-Maksson Proprietary

STANDARD COLOUR:

Inner Tube - White
Outer Cover - Green

MARKING ON THE HOSE:

Indo - Furnace- Carbon Free Hose LL Heat Resistant
I.D. W.P. India

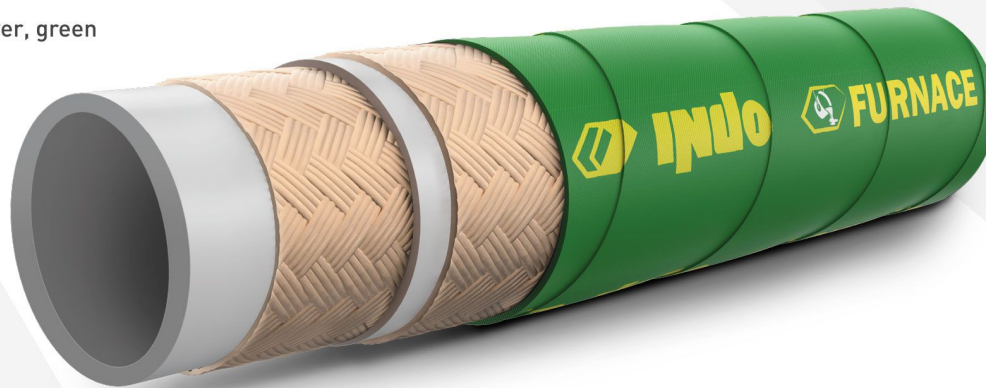

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.