
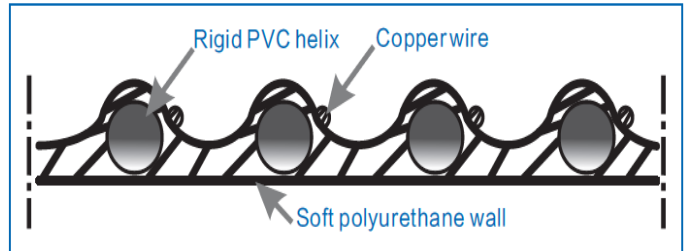


3PUR-ANT (Anti-Static – with Copper Wire)

Polyurethane Anti Static Suction Hose —Light Duty



Application:

As antistatic suction and transport hose ideally for below substance:

- ◆ Explosive powders, granulates, dust, mineral sands
- ◆ Gas, oil and chemical liquids
- ◆ Abrasive solids such as dusts, powders, chips and grains
- ◆ Also suitable for industrial vacuum cleaners, and granulate conveying systems

Features:

- ◆ Anti-static by grounding the copper wire
- ◆ High tensile strength
- ◆ Tearing resistant with rigid PVC helix
- ◆ Very transparent wall
- ◆ Extremely smooth interior
- ◆ Comply to RoHS

Material:

Wall: Top grade of polyurethane

Spiral: Rigid PVC and copper wire

Working temperature range:

-40°C to 90°C (Short time to 125°C)

ID(mm)	OD(mm)	Wall Thickness (mm)	Smallest Bending Radius (from outer edge of hose) (mm)	Recommended operating limits		Length per piece (m)
				Work Pressure(bar)	Vacuum Pressure(bar)	
25	32	0.8	60	2.2	0.50	20
32	37	0.8	80	2.0	0.40	20
38	45	0.8	100	1.8	0.35	20
51	59	0.8	128	1.6	0.30	20
63	72	0.8	158	1.5	0.25	20
76	87	0.8	188	1.3	0.22	20
89	100	0.8	230	1.2	0.20	20
102	112	0.8	300	1.0	0.18	20